


Nakrętki sześciokątne niskie

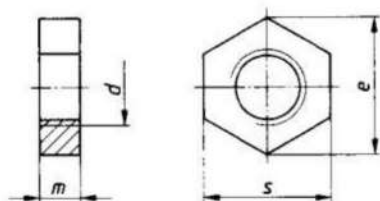

Hexagon thin nuts
Sechskantmuttern, niedrige Form B (mit Fase)
ISO 4035
PN/M 82153

d	s	e	m		sztuk w opakowaniu
BM 1,6	3,2	3,48	1	+	1000
BM 2	4	4,38	1,2	+	1000
BM 2,3	4,5	5,2	1,2	+	1000
BM 2,5	5	5,51	1,6	+	1000
BM 2,6	5	5,8	1,6	+	1000
BM 3	5,5	6,08	1,8	+	1000
BM 4	7	7,74	2,2	+	1000
BM 5	8	8,87	2,7	+	1000
BM 6	10	11,05	3,2	+	1000
BM 8	13	14,38	4	+	500
BM 10	17	18,9	5	+	200
BM 12	19	21,1	6	+	200
BM 14	22	24,49	7	+	100
BM 16	24	26,75	8	+	100
BM 18	27	30,14	9	+	50
BM 20	30	33,53	10	+	50
BM 22	32	35,72	11	+	50
BM 24	36	39,98	12	+	25
BM 27	41	45,63	13,5	+	25
BM 30	46	51,28	15	+	25
BM 33	50	55,8	16,5	+	10
BM 36	55	61,31	18	+	10
BM 39	60	66,96	19,5	+	10
BM 42	65	72,61	21	+	10
BM 45	70	78,26	22,5	+	10
BM 48	75	83,91	24	+	10